



CLICK ANYWHERE FOR MORE DETAILS

MANUAL PREVIEW

JENSALES

Gibson
Operator's Manual
A, D & Super D
Garden Tractor

purchase full manual at

Operator's Manual

JENSALES.COM

or Call 800-443-0625



CLICK ANYWHERE FOR MORE DETAILS

THIS IS A MANUAL PRODUCED BY JENSALES INC. WITHOUT THE AUTHORIZATION OF GIBSON OR IT'S SUCCESSORS. GIBSON AND IT'S SUCCESSORS ARE NOT RESPONSIBLE FOR THE QUALITY OR ACCURACY OF THIS MANUAL.

TRADE MARKS AND TRADE NAMES CONTAINED AND USED HEREIN ARE THOSE OF OTHERS, AND ARE USED HERE IN A DESCRIPTIVE SENSE TO REFER TO THE PRODUCTS OF OTHERS.

GIB-OP-A+

CLICK ANYWHERE FOR MORE DETAILS

GIBSON
MODEL "D"
TRACTOR

MANUAL REVIEW

A
Gibson Garden Tractor
Compendium

JENSALES®

purchase full manual at



JENSALES.COM

or Call **800-443-0625**

Covering Models A, D, Super D and
Some Implements

Operating Instructions and Parts Lists
And a Collection of General Information

CLICK ANYWHERE FOR MORE DETAILS

CLICK ANYWHERE FOR MORE DETAILS



CLICK ANYWHERE FOR MORE DETAILS

Part No.	No. Req.	DESCRIPTION
162	4	½-13 Hex. Nuts (Brake Adj. Nuts)
44	2	Brake Drum
246	2	Brake Drum Key
28	2	Brake Lever Arm
45	2	Brake Lever Arm Pins
266	8	Gasket
WHEELS—ALL		
69	2	Rear Wheels—16"
37	10	Rear Wheel Lug Bolts
39	2	Rear Wheel Hub 16"
195	2	¾-18 N.F. x 3 L. Hex. Hd. Hub Bolt
196	2	¾-18 N.F.-Hex. Nut
160	2	¾ I.D. x 3/16 Thick Lock Washer
194	2	Hub Key
68	2	Rear Wheels 22"
37	12	Rear Wheel Lug Bolts
97	2	Rear Wheel Hub 22"
195	2	¾-18 N.F. x 3 L. Hex. Hd. Hub Bolt
196	2	¾-18 N.F. Hex. Nut
160	2	¾ x 3/16 Thick Lock Washer
194	2	Hub Key
71	2	Front Wheel 12" Complete With Hub
200	10	Front Wheel Lug Bolt
201	2	Front Wheel Hub With Bear. Cup.
92	2	Inner Timken Bearing
202	2	Outer Timken Bearing
100	2	Seal—Inner Side
203	2	Hub Cap

ENGINE ASSEMBLY		
213	4	¼-13 N. C. x 1½ L. Hex. Hd. Cap Screw
163	4	½ I.D. x 3/16 Lock Wash.
209	4	Engine Mount Pad
60	1	Motor Base
167	4	½-13 N.C. x 2 Hex. Hd. Bolts (Frame)
162	4	½-13 Hex. Nuts
163	4	½ I. D. x 3/16 Thick Lock Wash.
136	1	½-13 x ¼ L. Sq. Hd. Set Screw
206	2	10/24 x ¾ L. Machine Screw
207	2	10/24 Sq. Nut
208	2	10/24 I.D. Lock Washer
210	1	Throttle Control (Lever Only)
262	1	Starting Rope
205	1	Throttle Control Assem. Comp.

CLICK ANYWHERE FOR MORE DETAILS

MANUAL PREVIEW

JENSALLS®

purchase full manual at

or Call 800-443-0625

CLICK ANYWHERE FOR MORE DETAILS

Tires: Standard—8x24 rear; 4.00x12 front.
 Oversize—9x24 rear.
 Brakes: Two brakes located on drive axle, foot operated individually.
 Speeds: 2.0, 4.0 and 7.0 mph; reverse 2.5 mph.
 Shipping Weight: 1905 lbs.

Dimensions: Wheelbase 66"; height overall 60"; width overall, minimum 71", maximum 91"; rear wheel tread, minimum 47", maximum 84"; cultivating clearance 21 1/2"; turning radius 6'.

Power Take-Off: (Optional) 1 1/2" type 6 spline shaft, 603 rpm; spline end 20 3/4" above ground, on center line of tractor and 4 1/2" ahead of hitch point.

Lubrication: Crankcase capacity 3 1/2 qts.; transmission case capacity 1/2 gal.; capacity each final drive housing 1 1/2 qts.

Hydraulic Lift: (Standard) Pesco Model 05100404002 pump; 2 1/2 gpm delivery @ 1200 psi; reservoir oil capacity 2 qts. Double acting cylinder; 2" inside diameter; 6" piston stroke; maximum piston force 3750 lbs.; either push or pull variable stroke control; 1 1/4" cylinder length between pin centers; pin connection on cylinder; 3/8" diameter attaching pin.

Gibson Mfg. Corp., Longmont, Colo.
 Gibson Model H



Capacity: Two 14" plows.
 Performance: (Neb. Tractor Test No. 407) 24.55 hp max. belt; 22.77 hp max. drawbar; max. pull 3583 lbs. at 1.69 mph. (Corrected to sea level basis), 25.99 hp max. belt; 24.20 hp max. drawbar.

Engine: Hercules Model IKB3, L-head, 4 cylinders vertical, 3 1/4" —1800 rpm, displacement 133 cu. in., 31 rated hp.

Service Data: Champion 14 mm spark plugs; 3 rings per piston, 2 compression 1/4", 1 oil 3/16".

Accessories: Delco-Remy Model 1111714 generator standard equip.; Bowers Model SAE #1 battery standard equip.; Marvel-Schebler Model TSC 368 carburetor, size 1 1/2"; Handy governor; Guide lamps; Vortex Model G-50 air cleaner; Fram Model FBM-9 oil filter, cartridge no. C-9; Rockford 2-piece clutch, part no. CLA-1601-AF; Young radiator core, capacity 3 1/2 gals.; thermostat standard equip.; fuel tank capacity 17 gals.; Motor Wheel front and rear wheels; Timken front wheel and rear axle bearings; Timken and New Departure transmission bearings.

Tires: Standard—10x38 rear; 5.00x16 front. Oversizes—11x38 and 12x38 rear.

Brakes: Two brakes located on bull pinion shaft; foot operated either individually or simultaneously by interlocking.

all 67"; width overall 79"; rear wheel tread, minimum 47", maximum 85"; cultivating clearance 25"; turning radius 7'6".


Power Take-Off: (Standard) 1 1/2" six-spline shaft, 741 rpm; spline end 28 1/2" above ground, on center line of tractor and 13" ahead of hitch point.

Pulley: (Optional) 9-3/16x7 1/2", 1487 rpm; belt speed 3539 fpm.

Lubrication: Crankcase capacity 5 qts.; transmission case capacity 5 1/2 gals.

Hydraulic Lift: (Standard) Pesco Model 051004-0-H01 pump; 2 1/2 gpm delivery @ 1200 psi operating pressure; reservoir oil capacity 4 qts. Double acting cylinder; 2" inside diameter; 6" piston stroke; maximum piston force 3750 lbs.; both push and pull variable stroke control; pin connection on cylinder; 3/8" diameter attaching pin.

Gibson Mfg. Corp., Longmont, Colo.
 Gibson Model I

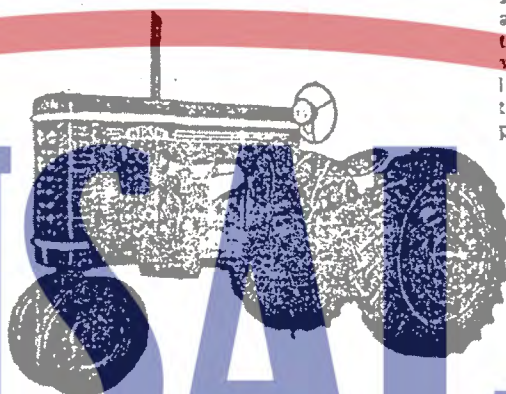

Capacity: Two or three 14" plows.
 Performance: (Neb. Tractor Test No. 408) 41.03 hp max. belt; 36.73 hp max. drawbar; max. pull 4676 lbs. at 2.56 mph. (Corrected to sea level basis) 43.05 hp max. belt; 38.12 hp max. drawbar.

Engine: Hercules Model QXD-5, L-head, 6 cylinders vertical, 3-7/16x4 1/4"—1800 rpm, displacement 230 cu. in., 40 rated hp.

Service Data: Champion 14 mm spark plugs; 4 rings per piston, 3 compression 1/4", 1 oil 3/16".

Accessories: Delco-Remy Model 1101392 generator standard equip.; Bowers Model SAE #1 battery standard equip.; Marvel-Schebler Model TSC 369 carburetor, size 1 1/2"; Novi Model 52704A-3 governor; Guide lamps; Vortex Model G-55 air cleaner; Fram Model F-4-58 oil filter, cartridge no. C-4; Rockford 2-piece clutch, part no. CLA-1601-AF; Young radiator core, capacity 4 gals.; thermostat standard equip.; fuel tank capacity 20 gals.; Motor Wheel front and rear wheels; Timken front wheel and rear axle bearings; Timken and New Departure transmission bearings.

Tires: Standard—10x38 rear; 5.50x16 front. Oversize 12x38 rear.

Brakes: Two brakes located on bull pinion shaft, foot operated either individually or simultaneously by interlocking.

Speeds: 2.16, 3.37, 4.75 and 13.74 mph, reverse 2.00 mph.

Shipping Weight: 4000 lbs.
 Dimensions: Wheelbase 94"; height overall 67"; width overall 79 1/2"; rear wheel tread, minimum 49", maximum 90"; cultivating clearance 25"; turning radius 8'6".

Power Take-Off: (Standard) 1 1/2" six-spline shaft, 741 rpm; spline end 26 1/2" above ground, on center line of tractor and 13" back of hitch point

Hydraulic Lift: (Standard) Pesco Model 05100404002 pump; 2 1/2 gpm delivery @ 1200 psi; reservoir oil capacity 2 qts. Double acting cylinder; 2" inside diameter; 6" piston stroke; maximum piston force 3750 lbs.; either push or pull variable stroke control; 1 1/4" cylinder length between pin centers; pin connection on cylinder; 3/8" diameter attaching pin.

CLICK HERE FOR MORE DETAILS

INTERNATIONAL TRACTORS

purchase manual at

800-443-0625

CLICK HERE FOR MORE DETAILS